



SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

DATE 15/Dec/2021 **REVISION NO.** A

PART NO. AMPI7524GDR15MT

DRAWN NO.

Signature

Approved by	Checked by	Drawn by

ARLITECH ELECTRONIC CORP.

14F NO. 646 SEC.5, CHUNG HSING RD.,
SANCHUNG DIST., NEW TAIPEI CITY, TAIWAN

TEL: (02)2999-8313 FAX: (02)2995-7520

RoHS+HF

SPECIFICATION FOR APPROVAL

[illegible]

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

1/9

REVISION

A

DATE

2021/12/15

PRODUCT IDENTIFICATION

<u>A M P I</u>	<u>7 5 2 4</u>	<u>G D</u>	<u>R 1 5</u>	<u>M</u>	<u>T</u>
①	②	③	④	⑤	⑥

① Product Series: VMPI=Vehicle Molding Power Inductor

② Dimension: Length*High

③ Type: Type Code

④ Inductance(uH): R15=0.15

⑤ Tolerance: M=±20%

⑥ Package: T=Taping

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

2/9



REVISION

A

DATE

2021/12/15

SHAPE & DIMENSION (UNIT: mm)

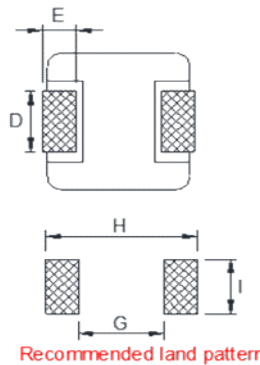

A	7.6±0.3
B	8.3±0.5
C	2.2±0.2
D	3.0±0.5
E	2.0±0.5
W	0.15±0
G	2.85
H	9.3
I	3.5

ELECTRICAL SPECIFICATION

MEAS. ITEM	SPEC.			TEST FREQ.	CONDITIONS
L_0	0.15	μH	$\pm 20\%$	100KHz/1V	$T_a=20\sim 25^{\circ}C$, $I_{dc}=0A$
DCR	0.90	m Ω	$\pm 7\%$		$T_a=20^{\circ}C$
I_{sat}	50	A	Typ.	100KHz/1V	$\Delta L/L \leq 30\%$
I_{rms}	35	A	Typ.	100KHz/1V	$\Delta T \leq 40^{\circ}C$

GENERAL SPECIFICATION

Electrical specifications : at 20~25°C

Operation Temperature : -40~+125°C (Including self-temperature rise)

Storage Temperature : -40~85°C(after PCBA);-5~35°C(before PCBA)

Storage R.H. : 40~70%(before PCBA)

Resistance to solder heat: 260°C/10 seconds

Coating: Gray

NOTE:

※Test Instrument : LCR METER(Chroma3250,Test1790), BIAS CURRENT SOURCE(Chroma1320,Chroma1320S)

※ I_{sat} : For Inductance drop approximately 30% from its value without bias current.

※ I_{rms} : Typical Heat Rating D.C current would cause an approximately ΔT of 40°C ($T_a=20\sim 25^{\circ}C$)

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

3/9


REVISION

A

DATE

2021/12/15

MATERIAL LIST

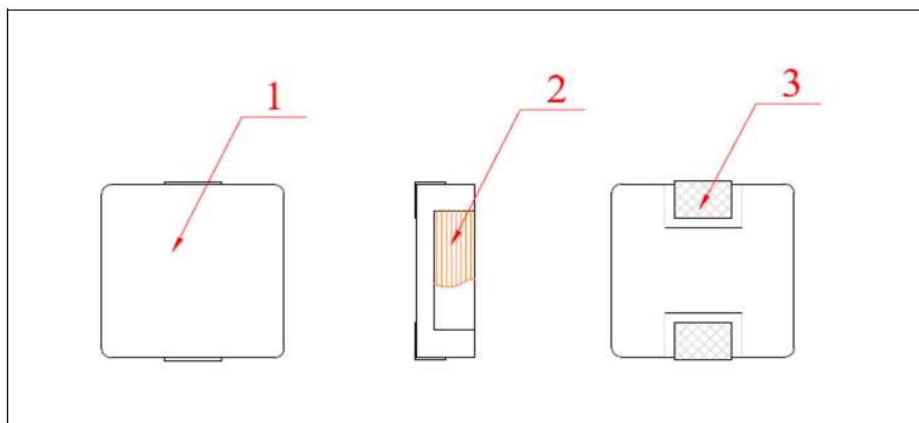

NO.	ITEM	MATERIAL	VENDER	Remark
1	Core	Powder	ARLITECH OR EQUIVALENT	
2	Wire	Copper Wire	JUNG SHING PACIFIC ELEKTRISOLA OR EQUIVALENT	
3	Electrode	Sn-Ag-Cu	YANKANGDA OR EQUIVALENT	

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

4/9

REVISION

A


DATE

2021/12/15

PACKAGING


Reel dimensions

UNIT: mm

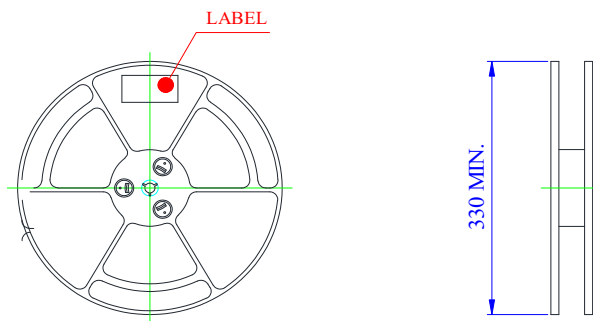

Tape dimensions

UNIT: mm
TOLERANCE: ± 0.1

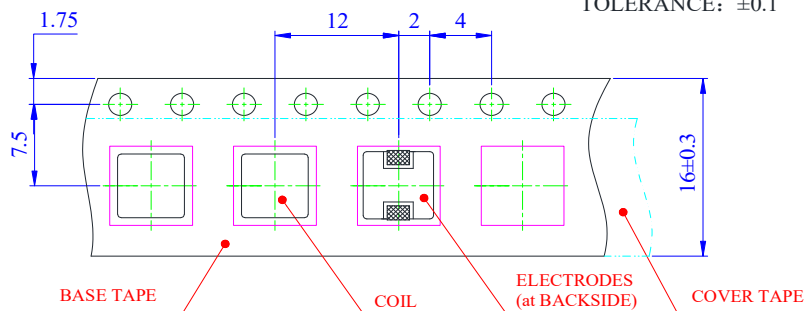

Packaging

Quantity: **1000** pcs/reel

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

5/9


REVISION

A

DATE

2021/12/15

CARTON

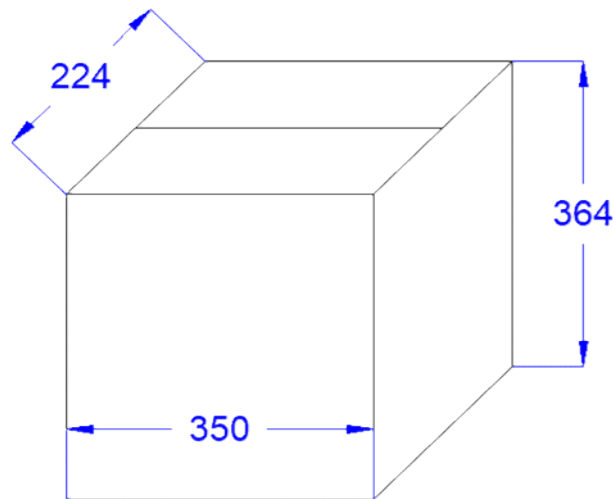

1000 pcs/reel

5 reel/carton

5000pcs/carton

Carton:350x224x364mm

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

6/9



REVISION

A

DATE

2021/12/15

RELIABILITY TEST

MECHANICAL RELIABILITY		
Test Items	Test Conditions	Criteria
Adhesion strength	<p>A static load using a R0.5 pressing tool with 10N shall be applied to the body of the specimen in the direction of the arrow and shall be hold for 10s,measure after removing pressure.</p> 	change from an initial value L:within±10%
Terminal strength	<p>Add static load 10N to inductor through hole of test board for 5±2 sec.</p> 	no detachment of terminal pin and no breakage of wire.
Vibration test	<p>Frequency: 10 ~ 55 ~ 10Hz Amplitude: 1.5mm Sweep time: 2 cycle Test Directions: X,Y,Z Test Time: 2 hours each direction</p>	change from an initial value L:within±10%
Drop test	Drop specimen three times on concrete floor from a height of 1 meter which mounted on test board.	change from an initial value L:within±10%
ENDURANCE RELIABILITY		
Test Items	Test Conditions	Criteria
Withstanding voltage	Ac voltage of 50V and Ac current of 1mA applied between inductor's terminal and core for 3 secs.	Inductors shall have no evidence of electrical and mechanical damage
Low temperature storage	Placed at -40°C for 1000 hours, then measured at room ambient temperature after placing 24 hours.	change from an initial value L:within±10%
High temperature storage	Placed at +125°C for 1000 hours, then measured at room ambient temperature after placing 24 hours.	change from an initial value L:within±10%
Thermal shock	Condition for 1 cycle: -40°C, 30min. ~ +125°C, 30min. Number of cycles: 100	change from an initial value L:within±10%
Humidity resistance	Placed at 90 to 95%RH, +60±2°C for 500 hours, then measured at room ambient temperature after placing 24 hours.	change from an initial value L:within±10%
High temperature dynamic operation test	Placed at +85°C for 500 hours, then measured at room ambient temperature with current test after placing 24 hours.	Inductance shall be within ±10% of the initial value. Appearance: No damage
Solderability test	Terminals shall be immersed for 5 to 10 seconds in flux at room temperature. Dip sample into solder bath containing molten soldr at 245±3°C for 3±0.5 seconds	New solder shall cover 90% minimum of the surface immersed.

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE

7/9

REVISION


A

DATE

2021/12/15


REFLOW-PROFILE

Heat endurance test

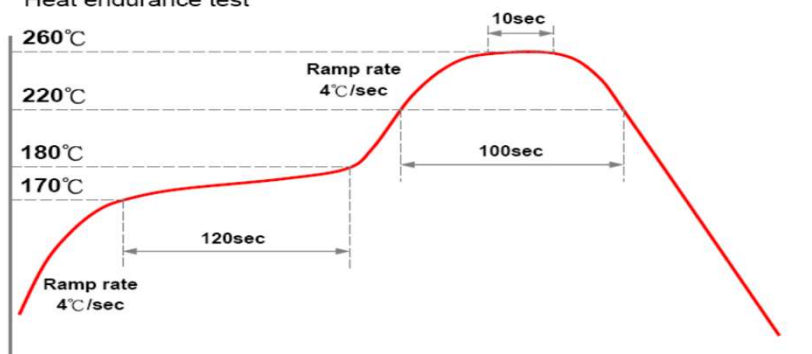

- ◎ The test should be made under the conditions according to the chart, after the test it is kept for 2 hours under the normal temperature and humidity.
- ◎ The reflow test can be done twice, but the interval should be more than one hour under the normal conditions.
- ◎ The reflow test conditions are based on the testing instruments available in Arlitech.

Recommended Reflow Profile (for EOC Solder paste **S70G-HF**)

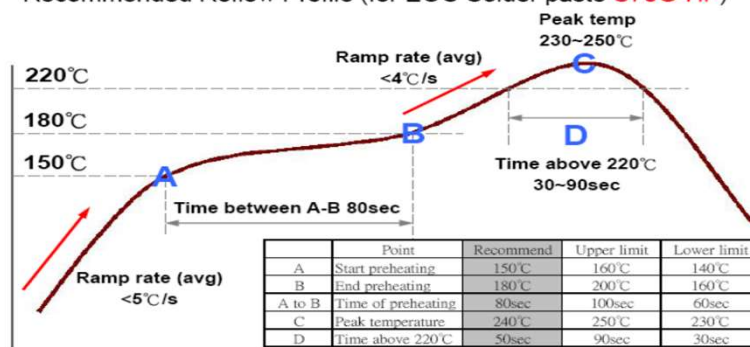

- ◎ The reflow condition recommended above is according to the machine used by our company. Big differences will arise as a result of the type of machine, reflow conditions, method, etc used. Hence, before setting up your reflow conditions, please confirm with the above.

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE 8/9


REVISION A

DATE 2021/12/15

Isat(Saturation Current):Transient current

AMPI7524GDR15MT

DC BIAS(A)	L(uH)	$\Delta T(^{\circ}\text{C})$
0	0.149	0.0
5	0.145	1.8
10	0.141	3.9
15	0.137	6.7
20	0.133	10.9
25	0.129	16.4
30	0.124	23.9
35	0.119	32.4
40	0.114	45.9
45	0.109	62.4
50	0.105	82.9

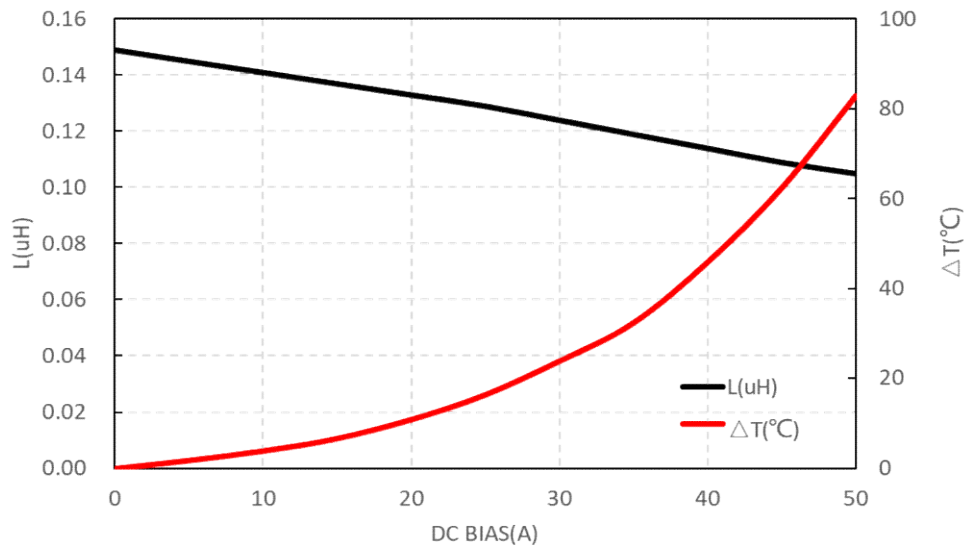

* DC bias current characteristics in the ambient temperature 20~25°C Frequency 100KHz/1V

SPECIFICATION FOR APPROVAL

CUSTOMER

CUSTOMER'S P/N

ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.

PAGE 9/9


REVISION A

DATE 2021/12/15

L-F CURVE

AMPI7524GDR15MT

FREQ(KHz)	L(uH)	$\Delta L/L(\%)$
100	0.150	0.00%
200	0.150	0.00%
300	0.149	-0.67%
400	0.148	-1.33%
500	0.148	-1.33%
600	0.147	-2.00%
700	0.147	-2.00%
800	0.146	-2.67%
900	0.145	-3.33%
1000	0.143	-4.67%

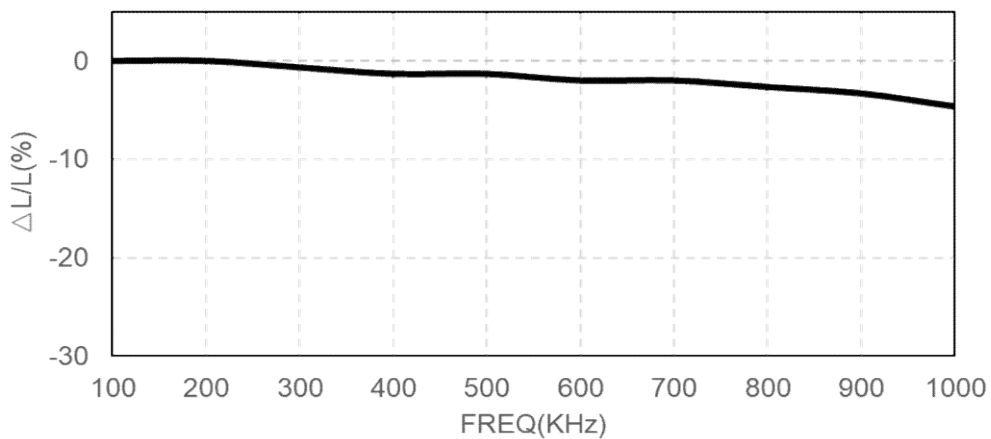

SPECIFICATION FOR APPROVAL

CUSTOMER
CUSTOMER'S P/N
ARLITECH P/N AMPI7524GDR15MT

DRAWN NO.
TEST R.H. 40~85%

TEST TEMP. 20~25°C

DATE 2021/12/15

TEST DATA FOR PREPRODUCTION SAMPLE

TEST RESOLUTION								DIMENSION (Unit : mm)				
MEAS. ITEM	L0 μH	DCR mΩ	Isat A	Irms A				A	B	C	D	E
SPEC.	0.15 ± 20%	0.90 ± 7%	50 Typ. ΔL/L≒30%	35 Typ. ΔT≒40°C				7.6±0.3	8.3±0.5	2.2±0.2	3.0±0.5	2.0±0.5
TEST FREQ.	100KHz/1V		100KHz/1V	100KHz/1V								
1	0.149	0.903	0.105	32.4				7.65	8.31	2.30	2.95	2.07
2	0.150	0.905	0.106	32.9				7.64	8.30	2.33	2.94	2.00
3	0.147	0.904	0.104	32.9				7.65	8.32	2.32	3.00	2.01
4	0.144	0.912	0.102	32.1				7.65	8.31	2.30	2.93	2.03
5	0.150	0.907	0.106	32.9				7.63	8.31	2.33	2.90	2.13
6	0.151	0.909	0.107	32.4				7.63	8.32	2.35	2.99	2.12
7	0.150	0.910	0.106	32.1				7.65	8.32	2.32	2.95	2.08
8	0.148	0.905	0.106	32.0				7.64	8.32	2.33	2.91	2.01
9	0.146	0.900	0.104	32.4				7.65	8.33	2.34	2.98	2.10
10	0.144	0.908	0.102	32.1				7.64	8.30	2.33	2.95	2.07
AVG.	0.1479	0.9063	0.1048	32.42				7.643	8.314	2.325	2.950	2.062
R	0.007	0.012	0.005	0.9				0.02	0.03	0.05	0.10	0.13

DRAWN BY				CHECKED BY				APPROVED BY				